

JIANGSU WUJIN KAILI ELECTRONIC FACTORY

SPECIFICATION SHEET


ELECTRONIC SPECIFICATION:



HPT17060A SERIES:

| Type | UNIT | HPT17060A |
|----------------------------|----------|-----------|
| *Min. Sound Output at 10cm | dB | 90 |
| Rated Voltage | Vp-p | 12 |
| Operating Voltage | Vp-p | 1~25 |
| Resonant Frequency | Hz | 4000 |
| .Rated Consumption | mA | 5 |
| Capacitance at 120 HZ | pF | 15000±30% |
| Operating Temperature | ℃ | -20 ~ +70 |
| Storage Temperature | ℃ | -30 ~ +80 |
| Dimension | Φ17*H6.0 | |
| Weight | g | 2 |

Value applying rated voltage (Resonant frequency, 1/2duty, square wave)

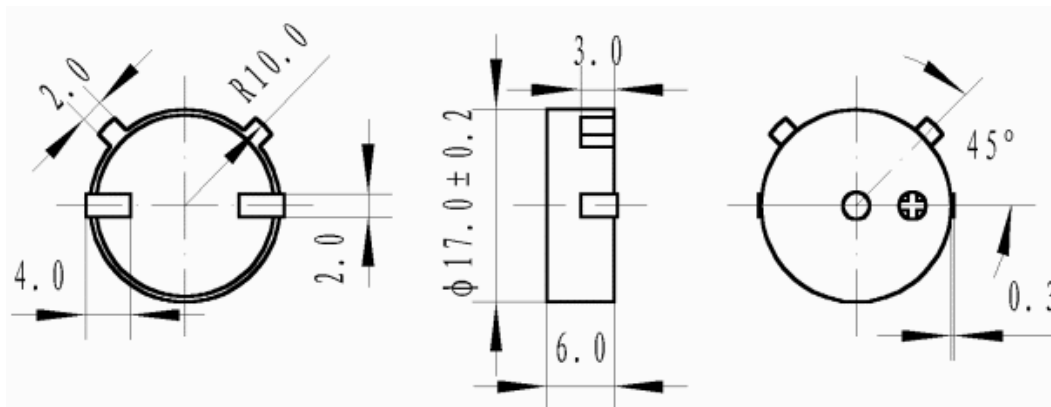

JIANGSU WUJIN KAILI ELECTRONIC FACTORY

Miaoqiao Town, Changzhou city, Jiangsu, China 213167

TEL: 0086-519-86462433; 86712320

FAX: 0086-519-86471336; 86712320

E-mail: kailiec@jmail.com.cn

[Http://www.piezo-buzzers.com](http://www.piezo-buzzers.com)